

JOTUN Sparkelremse papir

Product description

Type

JOTUN Sparkelremse papir is a special paper strip for use in joint filling on gypsum boards.



Features and benefits

JOTUN Sparkelremse papir is double perforated paper (electrically and mechanically), as a moderately rubbed surface and provides good adherence to the filler. In a correctly treated joint, **JOTUN Sparkelremse papir** in combination with **JOTUN Sparkel gipsplate fin**, provides the approximate tensile strength as the gypsum board. **JOTUN Sparkelremse papir** meets the requirement of paper strips in EN 13963.

Recommended use

Can also be used for mechanical application of paper strip, e.g. using "Bazooka". According to Norsk Standard (Norwegian Standard) only approved paper strips are allowed used for joint filling on gypsum boards. For best result it is recommended to use **JOTUN Sparkel gipsplate fin** for joint filling / adding paperstrip.

Depending on the surface, **JOTUN Projektspackel**, **JOTUN Spackel vägg och tak medium**, **JOTUN Rullspackel Medium universal**, **JOTUN Spackel våtrum**, **JOTUN Spackel maskinspackel fin** and **JOTUN Spackel Lagningspackel** can also be used for joint filling.

Product data

Packaging size	Width: ca 50 mm. Length: 23, 75 and 150 meter.
Colors	Yellowish white
Generic type	Paper strip, perforated and rubbed.

Application data

Application equipment / methods

Manual application or mechanical application (Bazooka or similar).

Directions for use

Substrate	Treatment
New gypsum boards:	<p>Make sure that the surfaces are dry and that dust, sand, mould and other impurities are removed before applying filler.</p> <p>Fill damages and gaps between the plasterboards that are more than 3 mm with JOTUN Sparkel herdende masse (filler). Recessed joints filled with JOTUN Sparkel gipsplate fin. Larger filling than 1.5 mm to be added in several layers. Place the filler strip with the Jotun logo facing the wall. Place JOTUN Sparkelremse papir in the wet filler and press it in firmly with a wide trowel. JOTUN Sparkelremse papir must only be used on gypsum boards. Remove excess filler. In dry and cold climatic conditions Jotun recommends applying the filler in thin layers when adding paper strip. The joint shall be leveled two</p>

times more and pulled out / distributed with a suitable filler tool. It is important that each layer of filler is dry before next layer is applied.


Management, Operation and Maintenance

Please refer to the FDV datasheet for information regarding maintenance and repair of the painted surface.

Approvals

CE-marking

A Declaration of Performance (DoP) for the product has been issued. For information about Declaration of Performance (DoP), see jotun.no - Profesjonelle.

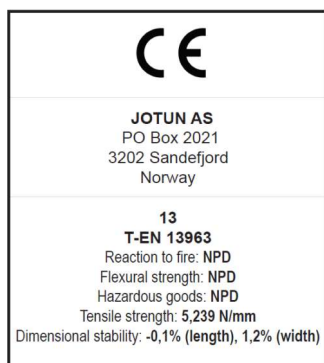

Miscellaneous

Contact information

Jotun Sverige AB
Box 151
421 22 Västra Frölunda
Tlf.: 031 69 63 00

Disclaimer

The information in this document is given to the best of Jotun's knowledge, based on laboratory testing and practical experience. Jotun's products are considered as semi-finished goods and as such, products are often used under conditions beyond Jotun's control. Jotun cannot guarantee anything but the quality of the product itself. Minor product variations may be implemented in order to comply with local requirements. Jotun reserves the right to change the given data without further notice.

Users should always consult Jotun for specific guidance on the general suitability of this product for their needs and specific application practices.

If there is any inconsistency between different language issues of this document, the English (Eng) version will prevail.