

## JOTUN Sparkel gipsplate fin

### Product description

#### Type

Light filler to be used indoors in dry rooms. Filler based on polymer dispersion, added light fillers and crushed dolomite marble.



#### Recommended use

Joint and spot treatment on gypsum boards and other boards. Can also be used for smoothing out plaster and concrete. To be used in dry rooms.

In combination with **JOTUN Sparkelremse papir**, it is well suited for gypsum board joints.

#### Substrate

Gypsum boards and other boards, as well as plaster and concrete.

23°C-50% R.H.



23°C-50% R.H.



Overmalbar / Övermålningsbar



### Product data

<b>Packaging size</b>	3 L, 10 L and 15 L pail. Also available in 0.4L tube, see separate TDS.
<b>Colors</b>	Beige.
<b>Solids by volume</b>	47 ± 2 volume%
<b>Specific gravity</b>	1.3
<b>Particle size</b>	0 - 0.2 mm
<b>Filling properties</b>	0-1,5 mm mm
<b>pH value</b>	8.2 to 8.9

### Application data

#### Application equipment / methods

Application and smoothing for the filler should be done with a trowel or steel trowel. Use sandpaper or felt trowel for sanding of fillers.

#### Guiding data for airless spray

Adapt nozzle size to the capacity of the spraying machine. When covering the whole area, a spray angle of 60 degrees is recommended.

#### Cleaning of painting tools

Water

### Product mixing ratio (by volume)

One component, ready for use.

### Spreading rate and film thickness

**Comments:** Dependent on the surface texture.

### Conditions during application

Surface temperature must be at least +10 °C.

### Cleaning of spillage

**JOTUN Spesial wipes** are recommended to clean spillage. **JOTUN Spesial wipes** are a convenient washing/cleansing wipe for use before and during paint work.

### Drying times

Thick layers, low temperature, high humidity and low air circulation will prolong the drying time.

#### The drying time is measured by stated values:

<b>Relative Humidity (RH)</b>	50 %
<b>Air temperature</b>	23 °C
<b>Substrate temperature</b>	23 °C

<b>Dust dry</b>	ca 30 min.
<b>Surface (touch) dry</b>	24 h
<b>Recoatable, minimum</b>	24 h
<b>Dry to use</b>	ca 24 h
<b>Dried/cured for sanding</b>	24 h

## Directions for use

### Surface preparation

Protruding unevennesses and concrete burrs must be removed by use of suitable tool, e.g. a trowel, or by grinding.

Glossy surfaces must be cleaned with **JOTUN Spesialvask før maling** and sanded.

Make sure that the surfaces are dry and that dust, sand, mould and other impurities are removed before applying filler.

### Pretreatment

Fill damages and gaps between the plasterboards that are more than 3 mm with **JOTUN Sparkel herdende masse** (filler).

### Filler

Recessed joints filled with filler.

Place **JOTUN Sparkelremse papir** in the wet filler and press it in firmly with a wide trowel (max width 20 cm). Make sure that the paper strip is deep enough to have a good light opening. There must be room for two more layers of putty without forming an elevation above the plasterboard joint. Remove excess filler. The joint shall be leveled 2 times more and pulled out / distributed with a suitable filler tool. It is important that each layer of filler is dry before next layer is applied.

Screw / nail holes and boards other than gypsum board, joint and spot filling 2-3 times.

**JOTUN Sparkelremse papir** must only be used on gypsum boards.

Gaps between the plasterboards that are more than 3 mm and damages must be filled with **JOTUN Sparkel herdende masse** (filler).

Jotun recommends always to apply the filler in thin layers when adding paper strip.

### Additional information

In dry and cold climatic conditions Jotun recommends applying the filler in thin layers when adding paper strip.

### Maintenance

Not applicable. The product is not used alone.

### Management, Operation and Maintenance

Please refer to the FDV datasheet for information regarding maintenance and repair of the painted surface.

### Storage

Storage ca 12 months if unopened packaging. Frost free freight and storage.

### Disposal of waste

Putty must not be emptied into sewers, but delivered to a local environmental station.




## Environmental labelling



## Approvals

### CE-marking

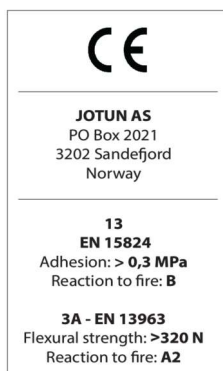

## Health and safety

Please observe the environmental and precautionary notices displayed on the container.

A Material Safety Data Sheet for the product has been issued.

Detailed information regarding health and safety risks and precautions for the use of this product is specified in the product's Safety Data Sheet.

**First-aid measures**, refer to section 4.

**Handling and storage**, refer to section 7.

**Transport information**, refer to section 14.

**Regulatory information**, refer to section 15.

---

## Contact information

Jotun Sverige AB  
Box 151  
421 22 Västra Frölunda  
Tlf.: +46 31 69 63 00

## Disclaimer

The information in this document is given to the best of Jotun's knowledge, based on laboratory testing and practical experience. Jotun's products are considered as semi-finished goods and as such, products are often used under conditions beyond Jotun's control. Jotun cannot guarantee anything but the quality of the product itself. Minor product variations may be implemented in order to comply with local requirements. Jotun reserves the right to change the given data without further notice.

Users should always consult Jotun for specific guidance on the general suitability of this product for their needs and specific application practices.

If there is any inconsistency between different language issues of this document, the English (Eng) version will prevail.