

JOTUN Slett vegg forgrunnet

Product description

Type

JOTUN Slett vegg forgrunnet is a paintable non-patterned weave of cellulose/polyester, 110 grams.

Features and benefits

Gives good coverage with 2 coats of paint. Has good reinforcing properties and can be used on both walls and ceilings. The pre-priming has been applied in a tub, which ensures an even application and consequently that the weave can be hung on both sides.

Substrate

Recommended for dry rooms to create a uniform surface that can be painted. Used in system with **JOTUN Rullesparkel** (full coverage), the weave is well suited for covering old, patterned woven glass fibre and masonry structure.

Product data

Packaging size Rolls: width 1 m, lengths 10 m and 50 m.

Generic type Manufactured by soft cellulose- and polyester fibres.

Directions for use

The substrates must be clean, dry and free from dust. Temperature of substrate and air must be minimum +10 °C.

The product is cut into lengths 5-10 cm longer than the ceiling height.

Joint and spot treatment, as well as full coverage, should be performed according to requirements of the different substrates.

Highly absorbent surfaces must be covered with 1 part **JOTUN Lim standard** or **JOTUN Lim ekstra** + 3 part water, or primed with **LADY Vegg/JOTAPROFF PVA 07** or equivalent, to prevent the adhesive from being absorbed by the substrate.

Directions for hanging: Apply **JOTUN Lim standard** or **JOTUN Lim ekstra** to the substrate. The adhesive is ready for use. Apply the adhesive evenly and allow some humidity to evaporate before hanging begins. The dry length of glass fibre is mounted vertically, edge-to-edge, the joint is adjusted and smoothed with a wallpaper smoother. Work from the center and outwards. Cut with a sharp knife where required.


Topcoating: Ceiling: 2 coats of desired product and gloss, e.g. **LADY Perfection**, **SENS Tak 02**, **JOTAPROFF Primadekk** or **JOTAPROFF PVA 02**.

Topcoating: Wall: 1 coat of desired product and gloss, e.g. **LADY Pure Color**, **LADY Wonderwall**, **LADY Balance**, **SENS Vegg panel list 07/30** or suitable JOTAPROFF products. Any unevenness in the substrate due to fibres to be sanded down lightly with sanding paper no. 120. Apply 1 coat with the same product used as 1st coat.

Maintenance

Approvals

CE-marking

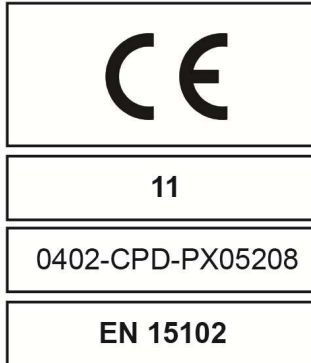

Miscellaneous

Product code: 14700

The first three characters of the Part Number: 9JR

Disclaimer

The information in this document is given to the best of Jotun's knowledge, based on laboratory testing and practical experience. Jotun's products are considered as semi-finished goods and as such, products are often used under conditions beyond Jotun's control. Jotun cannot guarantee anything but the quality of the product itself. Minor product variations may be implemented in order to comply with local requirements. Jotun reserves the right to change the given data without further notice.

Users should always consult Jotun for specific guidance on the general suitability of this product for their needs and specific application practices.

If there is any inconsistency between different language issues of this document, the English (Eng) version will prevail.