

Jotun Facade 2403

PRODUCT DESCRIPTION

This lead-free TGIC-free powder coating is specifically designed to meet stringent requirements of the construction industry. It provides longevity to the projects and building components by ensuring gloss retention, colour stability and corrosion protection. This powder enables efficient application and provides uniform flow and attractive finish even after recycling. This product is certified according to Qualicoat Class 1 and has weathering performance in line with AAMA 2603. This product is available in the following collections: Cool Shades Collection

This product contributes to the Green Buildings Standard credits. Please see section Green Building Standards.

Application areas

Primary areas of application are architectural aluminium extrusions and claddings. The overall excellent properties and attractive appearance of this product make it suitable for application to other ferrous and non-ferrous substrates.

When screen printing or sealants are used, it is advised to run separate trials to ensure compatibility and to meet the required performance criteria.

POWDER PROPERTIES

Property	Standard	Result
Specific gravity	Calculated	Max. 1.6 g/cm ³

Storage

Keep in a dry cool area. Maximum temperature 25 °C. Maximum relative humidity 60 %. If stored longer than 24 months a quality test must be performed.

APPLICATION

Pretreatment

The overall performance of the coating system is largely dependent on the nature of the substrate and the type and quality of the pretreatment. For optimal results, it is recommended to follow the pretreatment supplier's instructions and recommendations.

The recommended types of pretreatment for the most frequently used substrates are:


Substrate	Pretreatment
Aluminium	Chromate conversion
Steel	Zinc phosphate
Zinc coated steel	Zinc phosphate or chromate conversion
Final rinse (deionized)	The last running water from the object should be tested at 20 °C. The readings obtained should measure below 30 µS/cm.

Suitable chrome-free pretreatment for aluminium is also recommended. Due to the variety of chrome-free pretreatments available today, only the approved systems from Qualicoat and GSB should be used. Detailed advice should be sought from the pretreatment supplier.

Powder application

Recommended film thickness (µm): 60-80

Curing

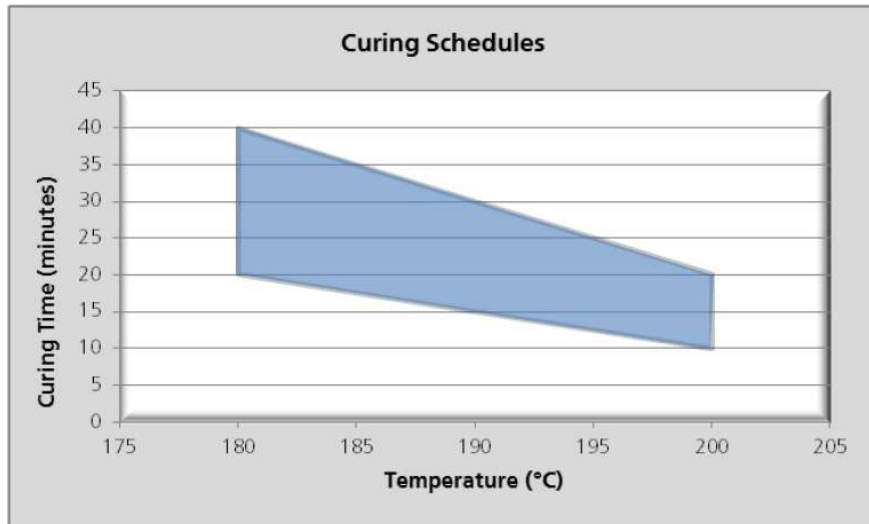

Equipment

Suitable for Corona or Tribo charging equipment.

APPEARANCE

- Colour** Available in RAL, NCS and in a wide assortment of custom-made colours, this coating provides a variety of effects, including metallic.
- Gloss** EN ISO 2813 (60°) 30±5
- Finish** Smooth

If the significant surface is too small or unsuitable for the gloss to be measured with the glossmeter, the gloss should be compared visually with the reference sample (from the same viewing angle).

Gloss measurements of metallic effect coatings can show deviation from original levels specified in this document and visual comparison with the reference sample is recommended.

Gloss range used in TDS and on the label of the metallic effect coatings represents gloss of the base and not of the final finish.

PERFORMANCE

The technical data provided below are typical for this product when applied as follows:

- Substrate Chrome-free treated aluminium panels
- Substrate thickness (mm) 0.8
- Film thickness (µm) 60-80

Typical values when tested.

Property	Standard	Result
Adhesion	EN ISO 2409	Cross-cut rating Gt0 (100 % adhesion)
Impact resistance	EN ISO 6272 /ASTM D2794 (impactor diameter 15.9 mm)	More than 23 inch-pounds or 2.5 Nm without film cracking

Cupping test	EN ISO 1520	Indentation depth in excess of 5 mm without film cracking
Flexibility	EN ISO 1519	Cylindrical mandrel bending test, passes 5 mm mandrel diameter
Film hardness	EN ISO 2815	Indentation resistance according to Buchholz: >80
Mortar resistance	EN 12206-1	The mortar must be easy to remove without leaving any residues.
Drilling, milling and sawing test		No flaking of coating.
Humidity resistance containing SO₂.	ISO 22479 Method B (0.2 I SO ₂) ISO 4628-2	No infiltration exceeding 1 mm on both sides of the scratch after 24 cycles.
Humidity resistance	EN ISO 6270-2 ISO 4628-2	No infiltration exceeding 1 mm on both sides of the scratch after 1000 hours
Acetic acid salt spray resistance	ISO 9227	After 1000 hours testing – maximum 16 mm ² infiltration over a scratch length of 10 cm.
Accelerated weathering	ISO 16474-3	Cycle: 4 hours at 50 °C UV and 4 hours at 40 °C condensation. No chalking, excellent gloss retention and colour stability after 300 hours testing.
Xenon Arc Accelerated Weathering	ISO 16474-2 Method A	Cycle: 102 minutes dry at 38 °C and 18 minutes water spray under UV. No chalking, excellent gloss retention and colour stability after 1000 hours testing.
Natural weathering test	ISO 2810 (South Florida, 27 °N)	No chalking, excellent gloss retention and colour stability after 12 months exposure (angle of 5° to South).
Flame Spread Index	ASTM E84	Class 1 or A
Smoke Development Index	ASTM E84	Class 1 or A
Total Solar Reflectance*	ASTM G173 ASTM C1549	Grade 2403R: TSR ≥ 0.25

* Only applicable for the colours featured in 'The Cool Shades Collection'.

Approvals

This product is certified according to Qualicoat Class 1 and GSB Standard requirements, and has weathering performance in line with AAMA 2603.
Qualicoat: P-0795 (TR), P-0929 (CZ), P-1028 (TH), P-1187 (CN)
GSB: 168 d (CZ)



Additional information

This product may be backed by a Product Performance Guarantee when applied on extruded architectural aluminium substrate. For further advice please contact your local Jotun office.

Sustainability

Powder coating is applied in air-and-powder mix in a strictly controlled factory process using electrostatic gun and a high temperature curing oven to create film. Virtually no VOCs are released in the process compared to traditional liquid paints. Unused or oversprayed powder can be recycled with minimal wastage. In addition, all Jotun Powder Coatings' products do not contain intentionally added lead.

Green Building Standards

This product contributes to Green Building Standard credits by meeting the following specific requirements:

LEED®v4 (2013)

MR credit: Building product disclosure and optimization

- Material Ingredients, Option 2: Material Ingredient Optimization, International Alternative Compliance Path - REACH optimization: Fully inventoried chemical ingredients to 100 ppm and not containing substances on the REACH Authorization list – Annex XIV, the Restriction list – Annex XVII and the SVHC candidate list.

- Environmental Product Declarations. Product-specific Type III EPD (ISO 14025;21930, EN 15804).

- SS Credit: Heat Island Reduction (ASTM E 1980)

- Option 1: Nonroof and Roof

1.2.a: High-reflectance roof (Steep-sloped roof)

1.2.b: High-reflectance roof (Low-sloped roof)

- Option 2: Parking under Cover

The following colours of the Cool Shades Collection comply with:

Arc: 1.2.a;2

Couronne: 1.2.a;2

Dayspring: 1.2.a;2

Equinox: 1.2.a;2

Meridian: 1.2.a;1.2.b;2

Sepia: 1.2.a;2

Sun path: 1.2.a;1.2.b;2

BREEAM® International (2016)

- Mat 01: Product-specific Type III EPD (ISO 14025;21930, EN 15804).

Disclaimer

The information in this document is given to the best of Jotun's knowledge, based on laboratory testing and practical experience. Jotun's products are considered as semi-finished goods and as such, products are often used under conditions beyond Jotun's control. Jotun cannot guarantee anything but the quality of the product itself. Minor product variations may be implemented in order to comply with local requirements. Jotun reserves the right to change the given data without further notice.

Users should always consult Jotun for specific guidance on the general suitability of this product for their needs and specific application practices.

If there is any inconsistency between different language issues of this document, the English (United Kingdom) version will prevail.