

JOTUN Rullespartel Medium DK

Product description

Type

Pre-mixed, light filler for roller application, suitable for the full filling of plasterboard joints with a roller, as well as the machine filling of plasterboard joints.

Features and benefits

The filler's consistency makes it ideal for the complete levelling of ceilings and walls where the structure of e.g. fibreglass wallpaper etc. is to be removed. The product is quickly and easily applied with a roller, and an optimal finish is achieved through subsequent smoothing with a spatula. The system gives a perfect result with a minimum need for sanding. Supplied in practical rectangular roller container. The product is CE labeled and certified according to EN13963.

Recommended use

Use only in dry rooms. The product can also be used for the filling of plasterboard joints when applying with a bazooka or filler box.

Product data

Packaging size	According to the current price list.		
Colours	Light grey		
Generic type	EVA polymer dispersion.. Aluminium silicate and Dolomit.		
Specific gravity	1	ca	
Particle size	0.2	mm	max

Application data

Remarks

The filler is not water-resistant. Can be overcoated.

Application equipment / methods

Roller, spray or a wide trowel.

Cleaning of painting tools

The tool should be cleaned with water before the filler dries. Dried filler can be removed by soaking in water. Filler on the skin can be removed using soap and water.

Thinner

Shall not be diluted.

Spreading rate and film thickness

Comments: Full levelling: 1 m²/litre for 1 mm thick layer.
Plasterboard joints: 0.3 l/m².

Conditions during application

The temperature of the air and substrate shall be at least 15-30°C upon application. Normal room temperature is recommended.

Drying times

Depending on film thickness, substrate type, temperature, humidity, ventilation. New filler or paint should not be applied until it is dry through, approximately 8-10 hours.

The drying time is measured by stated values:

Relative Humidity (RH) 50 %

Air temperature	23 °C
Substrate temperature	23 °C

Dry to use	Ca 8 - 10 hours
Dried/cured for sanding	8-10 hours

Directions for use

Surface preparation

All substrates shall be firm, clean and free from dust and loose particles. Any remaining unevenness and concrete bumps should be removed, e.g. by sanding or another appropriate method. Glossy surfaces must be cleaned with **JOTUN Spesialvask før maling** or a suitable cleaning agent and sanded.

Filler

Apply by roller or spray, smoth with a wide trowel or similar. For complete levelling, the filler can be most effectively applied with a long-haired roller. The filler can be applied using traditional spray equipment suitable for the application of sprayable fillers. The product can also be used for the filling of plasterboard joints when applying with a bazooka or filler box.
Can be applied in a maximum thickness of 4 mm. Larger filling than 4 mm to be added in several layers. Thicker layers significantly extend the drying time. It can be advantageous to apply several thin layers in order to ensure full through-hardening. The filler must be fully cured between each application. Use sandpaper on water-thinned products when sanding the filler.

Storage

In storage and in transport keep the container frost free and upright. Shelf life of min. 1 year in unopened packaging when stored in a cool place.

Environmental labelling




The product is recognized by Miljømærkning Danmark, and conforms with the demands of the environmental label Svanen (the swan).

Approvals

CE-marking

A Declaration of Performance (DoP) for the product has been issued.

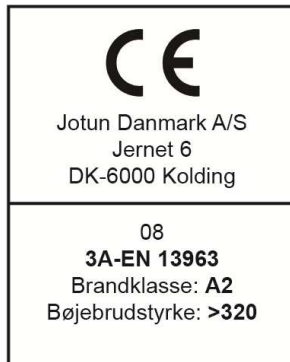

Health and safety

Please observe the environmental and precautionary notices displayed on the container.

A Material Safety Data Sheet for the product has been issued.

Detailed information regarding health and safety risks and precautions for the use of this product is specified in the product's Safety Data Sheet.

First-aid measures, refer to section 4.

Handling and storage, refer to section 7.

Transport information, refer to section 14.

Regulatory information, refer to section 15.

Product registration number: Not to be declared



Contact information

Jotun Danmark A/S
Jernet 6
6000 Kolding
Tlf.: +45 76 30 32 00
Mailadresse: mail@jotun.dk

Disclaimer

The information in this document is given to the best of Jotun's knowledge, based on laboratory testing and practical experience. Jotun's products are considered as semi-finished goods and as such, products are often used under conditions beyond Jotun's control. Jotun cannot guarantee anything but the quality of the product itself. Minor product variations may be implemented in order to comply with local requirements. Jotun reserves the right to change the given data without further notice.

Users should always consult Jotun for specific guidance on the general suitability of this product for their needs and specific application practices.

If there is any inconsistency between different language issues of this document, the English (Eng) version will prevail.

This Technical Data Sheet supersedes those previously issued.

Jotun Danmark recommends that you consult our technical data sheet (TDS), safety data sheet (SDS) as well as data sheet for Operations and Maintenance for the product.

Please visit our website at www.jotun.dk to find a Jotun dealer near you.

Technical Data Sheet

JOTUN Rullespartel Medium DK

