

## LADY Supreme Finish Superblank

### Product description

#### Type

Waterborne oil based paint for woodwork indoors.



#### Features and benefits

Provides an even, strong and smooth surface with an elegant, super-glossy appearance. It has low odour.

#### Recommended use

Intermediate and Topcoat on panels, MDF, furniture, doors, trims and mouldings.



### Product data

#### Packaging size

0,75 L (filling level 0,68 L) and 3 L (filling level 2.7 L)

#### Base availability

White, A, B and C All bases may not be available in all markets. Check with your local supplier.

#### Tinting

Bases must be tinted using **Jotun Multicolor**.


Up to 10 % with **Jotun Multicolor** colorants.

#### Colors

White base may be used untinted as White.

#### Gloss level

80 super-glossy

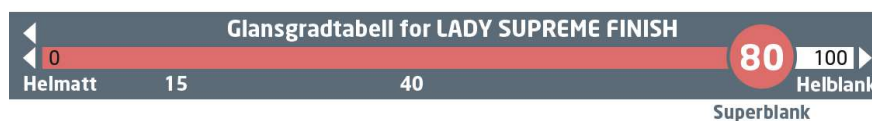

#### Generic type

Water-borne polyurethane modified oil paint.

#### Solids by volume

33 ± 2 volume%

#### Specific gravity

1.1 - 1.3

#### VOC for Ready-for-Use Mixture

EU limit value for the product (cat. A/d): 130 g/l. The product contains max 80 g/l VOC.

## Application data

### Remarks

Contents of tins with different production numbers should be mixed. Stir well. Oil based paint may turn yellow over time.

### Application equipment / methods

Brush or roller and brush. Apply rich and evenly.  
Spraying: For professional application only.

### Guiding data for airless spray

|                            |                                  |
|----------------------------|----------------------------------|
| <b>Nozzle tip</b>          | 0.20–0.36 mm (0.008–0.014")      |
| <b>Spray angle degrees</b> | 50–80°                           |
| <b>Pressure at nozzle</b>  | 15 MPa (150 kg/cm <sup>2</sup> ) |

The choice of nozzle tip / spray angle / pressure must be adapted to the relevant spray equipment and surface.

**The product must be sprayed by professionals only.**

### Spreading rate and film thickness

|                     | Spreading rate<br>per coat<br>(m <sup>2</sup> /liter) | Film thickness per coat<br>(µm) |                  |
|---------------------|---|---------------------------------|------------------|
|                     |   | Wet (calculated)                | Dry (calculated) |
| <b>Recommended:</b> | 8 – 10  | 100 – 125                       | 33 – 41          |

### Dilution

The product is ready to use and must not be diluted.

### Conditions during application

Air and surface temperature must be above +10 °C during application.

### Cleaning of painting tools

Water and **JOTUN Penselrens**.

### Drying times

**The drying time is measured by stated values:**

|                               |       |
|-------------------------------|-------|
| <b>Relative Humidity (RH)</b> | 50 %  |
| <b>Air temperature</b>        | 23 °C |
| <b>Substrate temperature</b>  | 23 °C |

|                            |         |
|----------------------------|---------|
| <b>Surface (touch) dry</b> | 2 h     |
| <b>Recoatable, minimum</b> | 8 h     |
| <b>Dry to use</b>          | 24 h    |
| <b>Fully cured</b>         | 4 weeks |

## Directions for use

### Surface preparation

The substrate must be clean, sound and dry.

| Substrate                      | Treatment  |
|--------------------------------|--|
| Untreated yellowed paneling:   | Untreated yellowed paneling must be cleaned with <b>JOTUN Spesialrens gulnet panel</b> , 1:10. Sand lightly and remove the dust. |
| Previously painted wood:       | Clean with <b>JOTUN Spesialvask før maling</b> . Use gloves. Sand down and remove dust.  |
| MDF and hard, smooth surfaces: | Sand down and remove dust.   |

### Primer

| Substrate                      | Treatment                                     |
|--------------------------------|---|
| Unpainted woodwork:            | 1-2 x <b>JOTUN Kvist- og sperregrunning</b> . |
| MDF and hard, smooth surfaces: | 1 x <b>JOTUN Heftgrunning Universal</b> .     |

### Topcoat

2 x **LADY Supreme Finish Superblank**. Light sanding between coats is recommended for best end result.

### Cleaning

**JOTUN Spesial wipes** are recommended to clean spillage. **JOTUN Spesial wipes** are a convenient washing/cleansing wipe for use before and during paint work.

### Maintenance

Newly painted surfaces must not be cleaned the first four weeks (the product's curing time). If cleaning is necessary, the pH of the detergent must not exceed pH 9. **JOTUN Spesialvask før maling** is recommended. For daily cleaning the temperature of the wash water must be <40 °C.

### Management, Operation and Maintenance

Please refer to the FDV datasheet for information regarding maintenance and repair of the painted surface.

### Storage

In storage and in transport keep the container frost free and upright.

### Disposal of waste

Liquid paint and washing water with paint residues must not be emptied into drains or watercourses. It must be delivered to an approved local environmental protection station.



Must be empty and dry

### Environmental labelling



The product is recognized by Miljømerking Norge, and conforms with the demands of the environmental label Svanen (the swan).

**BREEAM® NOR** The product satisfies BREEAM® NOR HEA 02.

### Health and safety

Please observe the environmental and precautionary notices displayed on the container.

A Material Safety Data Sheet for the product has been issued.

Detailed information regarding health and safety risks and precautions for the use of this product is specified in the product's Safety Data Sheet.

**First-aid measures**, refer to section 4.

**Handling and storage**, refer to section 7.

**Transport information**, refer to section 14.

**Regulatory information**, refer to section 15.

### Miscellaneous

#### NOBB number

This document covers the following NOBB numbers:

57916963, 57916766, 57916978, 57916982, 57916997, 57917001, 57917016, 57917020

#### NOBB module number

42239325

#### Contact information

Jotun A/S  
P.O.Box 2021  
3202 Sandefjord  
Tel: 33 45 70 00

#### Disclaimer

The information in this document is given to the best of Jotun's knowledge, based on laboratory testing and practical experience. Jotun's products are considered as semi-finished goods and as such, products are often used under conditions beyond Jotun's control. Jotun cannot guarantee anything but the quality of the product itself. Minor product variations may be implemented in order to comply with local requirements. Jotun reserves the right to change the given data without further notice.

Users should always consult Jotun for specific guidance on the general suitability of this product for their needs and specific application practices.

If there is any inconsistency between different language issues of this document, the English (Eng) version will prevail.