

## JOTAPROFF Akryl 10

### Product description

#### Type

Solvent free water-borne acrylic dispersion paint.

#### Features and benefits

Silky matt Has high mechanical durability. Very good adhesion to the surface..

#### Recommended use

For interior application. Use for intermediate coats and top coats where a silk matt surface is desired.

#### Substrate

For walls on substrates such as boards, overpaintable wallpaper, woven fabric, plaster, concrete and putty.

### Product data

<b>Packaging size</b>	3 L (BASE 2.7 L) and 10 L (BASE 9 L)
<b>Base availability</b>	White, A, B, C and yellow.
<b>Tinting</b>	Bases must be tinted using Jotun Multicolor. If white base is bought as white colour, it shall NOT be tinted using Jotun Multicolor. All other colour formulations to be mixed over Jotun Multicolor. Up to 10 % with Jotun Multicolor colorants.
<b>Colours</b>	White base is a fully pigmented white color.
<b>Gloss level</b>	Silky matt 10
<b>Generic type</b>	Water-borne acrylic paint
<b>Solids</b>	42 ± 2 volume%
<b>Specific gravity</b>	1,38
<b>VOC for Ready-for-Use Mixture</b>	EU limit value for this product (cat. A/a): 30 g/l (2010). This product contains max 1 g/l VOC.

### Application data

#### Remarks

Contents of tins with different production numbers should be mixed. Stir well.

#### Application methods

Brush, roller or spray. Preferred application with roller, but brush or airless spray may also be used. Apply rich and evenly.

#### Guiding data for airless spray

<b>Nozzle tip</b>	0.53 mm (0.021")
<b>Spray angle degrees</b>	65°- 80°
<b>Pressure at nozzle</b>	Min. 15 MPa (Min. 150 kg/cm <sup>2</sup> )

## Conditions during application

Temperature of substrate and air must be minimum +10 °C.

## Recommended film thickness per coat

<b>Dry</b>	Minimum	40 µm
<b>Dry</b>	Maximum	60 µm
<b>Wet</b>	Minimum	100 µm
<b>Wet</b>	Maximum	150 µm

## Spreading rate per coat

<b>Recommended</b>	7 - 10	m <sup>2</sup> /l
--------------------	--------	-------------------

## Cleaning of painting tools

JOTUN Penselrens and water.

## Drying times

Drying time deviates at changes in temperature, air humidity, air circulation and film thickness.

### Relative Humidity (RH) 50 %

<b>Air temperature</b>	23 °C
<b>Substrate temperature</b>	23 °C
<b>Dust dry</b>	1 h
<b>Dry to over coat, minimum</b>	3 h
<b>Dry to use</b>	24 h

## Directions for use

### Surface preparation

The substrate must be clean, sound and dry. Clean with JOTUN Husvask.

Sand down previously painted, old glossy/semi glossy paint with suitable abrasive paper and remove dust.

### Pretreatment

Bare iron and nail heads to be primed with QUICK BENGALACK METALLGRUNNING.

### Primer

Unpainted absorbent substrates, like wallpaper and unpainted concrete/plastered walls, must be primed before applying middle coat and top coat.

Previously painted: Old glossy/semi glossy paint must be primed with JOTUN Heftgrunning Universal.  
Ceilings discoloured by soot, nicotin etc.: Prime with JOTUN Kvist- og sperregrunning.

### Topcoat

2 x JOTAPROFF Akryl 10. 3 coats on absorbant, porous surfaces is recommended to avoid discolouring.

### Maintenance

N/A

### Storage


In storage and in transport keep the container frost free and upright.

### Disposal of waste

Liquid paint must not be emptied into drains or watercourses. It must be delivered to an approved local environmental protection station.



### Environmental labelling

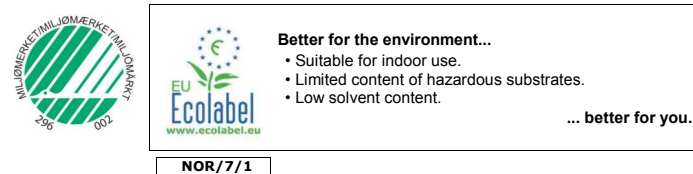

The product is recognized by Miljømerking Norge, and conforms with the demands of the environmental labels Svanen (the swan) and the ECO label.

### Health and safety

Please observe the environmental and precautionary notices displayed on the container.

A Material Safety Data Sheet for the product has been issued.

Detailed information regarding health- and safety risks and precautions for the use of this product is specified in the product's Safety Data Sheet.

First-aid measures, refer to section 4.

Handling and storage, refer to section 7.

Transport information, refer to section 14.

Regulatory information, refer to section 15.

### Miscellaneous

#### NOBB number

N/A

42157341, 42157386, 42157920, 42157935, 42158094, 42158105, 42158113, 42158272, 42158283, 42362437, 42362441, 42362505, 42565176, 42565335, 42565346, 42565354, 42565365, 42565441, 42565494, 42565577, 42565600, 44157763, 44641024

### Disclaimer

The information in this document is given to the best of Jotun's knowledge, based on laboratory testing and practical experience. Jotun's products are considered as semi-finished goods and as such, products are often used under conditions beyond Jotun's control. Jotun cannot guarantee anything but the quality of the product itself. Minor product variations may be implemented in order to comply with local requirements. Jotun reserves the right to change the given data without further notice.

Users should always consult Jotun for specific guidance on the general suitability of this product for their needs and specific application practices.

If there is any inconsistency between different language issues of this document, the English (United Kingdom) version will prevail.