

JOTUN Vegg og tak

Product description

Type

Water soluble, solvent free combination paint, containing acrylic, for use indoors.

Recommended use

Middle and topcoat on walls such as plaster, concrete, putty, boards, woven fabric, wallpaper etc, in dry rooms.

Product data

Packaging size	3 L (BASE 2.7 L) and 10 L (BASE 9 L)
Base availability	White/A, B and C
Tinting	Must be tinted using Jotun Multicolor. Up to 10 % with Jotun Multicolor colorants.
Gloss level	5 Matt
Generic type	PVA dispersion paint, containing acrylic.
Solids	38 ± 2 volume%
Specific gravity	1,5 kg/l
VOC for Ready-for-Use Mixture	EU limit value for this product (cat. A/a): 30 g/l (2010). This product contains max 1 g/l VOC.

Application data

Remarks

Contents of tins with different production numbers should be mixed to avoid possible colour deviations. Stir well.

Application methods

Roller, brush or airless spray. Apply rich and evenly.

The product can be applied by

Preferred application with roller, but brush or airless spray may also be used.

Guiding data for airless spray

Nozzle tip	0.46-0.53 mm (0.018-0.021")
Spray angle degrees	65-80°
Pressure at nozzle	Min. 15 MPa (Min. 150 kg/cm ²)

Recommended film thickness per coat

Dry	Minimum	35 µm
Dry	Maximum	55 µm
Wet	Minimum	80 µm
Wet	Maximum	130 µm

Spreading rate per coat

Recommended	Minimum	10 m ² /l
Recommended	Maximum	7 m ² /l

Cleaning of painting tools

Water and JOTUN Penselrens.

Drying times

Drying time deviates at changes in temperature, air humidity, air circulation and film thickness.

Relative Humidity (RH)	50 %
Air temperature	23 °C
Substrate temperature	23 °C
Dust dry	30 min.
Surface (touch) dry	30 min.
Dried to over coat, minimum	1 h
Dry to use	24 h

Directions for use

Surface preparation

The substrate must be sound, clean and dry: Clean with JOTUN Husvask. Rinse with water. Sand down previously painted, old glossy/semi glossy paint with suitable abrasive paper and remove dust.

Pretreatment

Bare iron and nail heads to be primed with QUICK BENGALACK METALLGRUNNING.

Primer

Chalking, bleeding and porous substrates: Should be brushed and then primed with JOTUN Heftgrunning Universal. Surfaces discoloured by soot, nicotine etc.: Prime with JOTUN Kvist- og sperregrunning.

Topcoat

2 coats JOTUN Vegg og tak.

Storage


In storage and in transport keep the container frost free and upright.

Disposal of waste

Liquid paint must not be emptied into drains or watercourses. It must be delivered to an approved local environmental protection station.



Environmental labelling

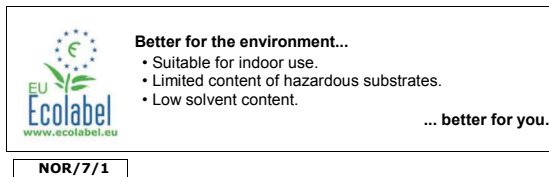

The product is recognized by Miljømerking Norge, and conforms with the demands of the environmental labels Svanen (the swan) and the ECO label.

Health and safety

Please observe the environmental and precautionary notices displayed on the container.

A Material Safety Data Sheet for the product has been issued.

Detailed information regarding health- and safety risks and precautions for the use of this product is specified in the product's Safety Data Sheet.

First-aid measures, refer to section 4.

Handling and storage, refer to section 7.

Transport information, refer to section 14.

Regulatory information, refer to section 15.

Disclaimer

The information in this document is given to the best of Jotun's knowledge, based on laboratory testing and practical experience. Jotun's products are considered as semi-finished goods and as such, products are often used under conditions beyond Jotun's control. Jotun cannot guarantee anything but the quality of the product itself. Minor product variations may be implemented in order to comply with local requirements. Jotun reserves the right to change the given data without further notice.

Users should always consult Jotun for specific guidance on the general suitability of this product for their needs and specific application practices.

If there is any inconsistency between different language issues of this document, the English (United Kingdom) version will prevail.