

## LADY Perfection

### Product description

#### Type

Waterborne dispersion paint for use indoors in dry rooms.




#### Features and benefits

**LADY Perfection** gives a perfect, completely matt ceiling. Easy to apply - without dripping and spilling. Provides a beautiful and stain free result. Wide range of colours. Cover warranty.


#### Recommended use

For smooth ceilings of boards, plaster, concrete, woven fabric and putty. For indoor use in dry rooms. **LADY Supreme Finish / LADY Interior Finish** is recommended for ceilings of wooden panels.

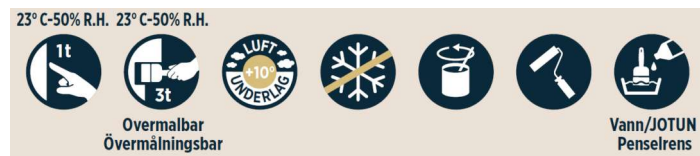

### Product data

|                                      |   |
|--------------------------------------|---|
| <b>Packaging size</b>                | According to the current price list.  |
| <b>Base availability</b>             | White base and B-base.  |
| <b>Tinting</b>                       | If white base is bought as white colour, it shall NOT be tinted using <b>Jotun Multicolor</b> . Bases must be tinted using <b>Jotun Multicolor</b> . Up to 10 % with <b>Jotun Multicolor</b> colorants. |
| <b>Colours</b>                       | White base may be used untinted as White.   |
| <b>Gloss level</b>                   | Completely Matt 02  |
| <b>Solids by volume</b>              | 33 ± 2 volume%  |
| <b>Specific gravity</b>              | 1.33  |
| <b>VOC for Ready-for-Use Mixture</b> | EU limit value for the product (cat. A/a): 30 g/l. The product contains max 10 g/l VOC.   |

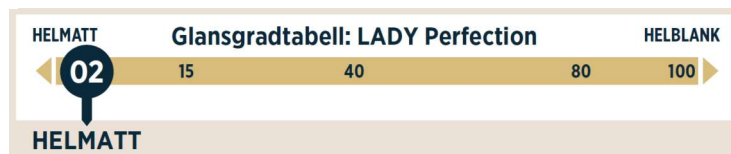

## Application data

### Remarks

Contents of tins with different production numbers should be mixed. Stir well.

### Application equipment / methods

Preferred application with roller, but brush or airless spray may also be used. Apply rich and evenly.

### Guiding data for airless spray

|                            |  |
|----------------------------|--|
| <b>Nozzle tip</b>          | 0.43-0.53 mm (0.017-0.021")                |
| <b>Spray angle degrees</b> | 50-80°                                     |
| <b>Pressure at nozzle</b>  | Min. 15 MPa (Min. 150 kg/cm <sup>2</sup> ) |

### Cleaning of painting tools

Water and **JOTUN Penselrens** or water and a suitable cleaning agent.

### Spreading rate and film thickness

|                     | Spreading rate<br>per coat<br>(m <sup>2</sup> /liter) | Film thickness per coat<br>(µm) |                  |
|---------------------|---|---------------------------------|------------------|
|                     |   | Wet (calculated)                | Dry (calculated) |
| <b>Recommended:</b> | 8 - 10  | 100 - 125                       | 33 - 41          |

### Conditions during application

Surface and air temperature must be minimum +10 °C.

### Cleaning of spillage

**JOTUN Spezial wipes** are recommended to clean spillage. **JOTUN Spezial wipes** are a convenient washing/cleansing wipe for use before and during paint work.

### Drying times

#### The drying time is measured by stated values:

|                               |       |
|-------------------------------|-------|
| <b>Relative Humidity (RH)</b> | 50 %  |
| <b>Air temperature</b>        | 23 °C |
| <b>Substrate temperature</b>  | 23 °C |
| <b>Surface (touch) dry</b>    | 1 h   |
| <b>Recoatable, minimum</b>    | 3 h   |

## Directions for use

### Surface preparation

The substrate must be clean, sound and dry.  
Clean with **JOTUN Spesialvask før maling**.  
Sand down previously painted old glossy/semi glossy paint with suitable abrasive paper and remove dust.  
Bare iron and nail heads to be primed with **QUICK Bengalack Grunning** or a suitable primer.

### Primer

| Substrate                                    | Treatment   |
|--|---|
| Chalking, bleeding and porous substrates:    | Should be brushed and primed with <b>LADY Vegg 10</b> . |
| Ceilings discoloured by soot, nicotine etc.: | Prime with <b>JOTUN Kvist- og sperregrunning</b> .      |

### Topcoat

2 x **LADY Perfection**.

### Maintenance

The product shall not be washed. Washing will cause stains.

### Management, Operation and Maintenance

Please refer to the Drift og Vedligeholdelse datasheet for information regarding maintenance and repair of the painted surface.

### Storage

In storage and in transport keep the container frost free and upright.

### Disposal of waste



One of our measures to reduce our environmental footprint is to use recycled plastic in the packaging.  
This bucket consists of up to 60% plastic that you have recycled (PCR). Does not apply to the lid.



Empty and dry pails can be sorted together with plastic packaging. The metal handle must be removed and be sorted with metallic packaging. See the QR code for more information.



Sorted as plastic when empty and dry.



Remove the handle

Liquid paint and washing water with paint residues must not be emptied into drains or watercourses. It must be delivered to an approved local environmental protection station.



Must be empty and dry

## Environmental labelling



The product is recognized by Miljømerking Norge, and conforms with the demands of the environmental label Svanen (the swan).

## Green Building Standards

The declared product contributes to Green Building Standard credits by meeting the following specific requirements:

- The emission requirements for M1: Classification of Indoor Environment 2018
- Swan (2096 0002)
- Property criteria in BETA (2018:A2)
- Class B according to Bedømningskriterier (Assessment Criteria) 6.0 for SundaHus (2013)

BREEAM® NOR (2016)

- Hea 02: VOC content for "Interior matt walls and ceilings" (30 g/l) (EU Directive 2004/42/CE) and emission demands (ISO 16000-series).
- Mat 01: Product specific type III EPD (ISO 14025, ISO 21930, EN 15804) for Jotun A/S.
- Mat 01: The product Safety Data Sheet confirms that the product does not contain any substances on the Norwegian A20 list.

Additional certificates and approvals may be available on request.

## Product warranty



More about Jotun's Product Warranty:

**Product Warranty Terms:** Directions for use must be followed.

**The product warranty content:** The product warranty "covers in two coats" means that the surface colour is covered after applying two coats on non-absorbent surfaces. The warranty gives the purchaser the right, to receive new paint, to cover the surface colour. This does not cover the labour cost of the paint work undertaken. Damages to the paint due to defects in the surface or during application are beyond the product warranty. Consumer's rights directed by the law are in addition to, and are not limited by the product warranty.

## Health and safety

Please observe the environmental and precautionary notices displayed on the container.

A Material Safety Data Sheet for the product has been issued.

Detailed information regarding health and safety risks and precautions for the use of this product is specified in the product's Safety Data Sheet.

**First-aid measures**, refer to section 4.

**Handling and storage**, refer to section 7.

**Transport information**, refer to section 14.

**Regulatory information**, refer to section 15.

Safety rules

00-1

1993

Product registration number: Not to be declared

## Contact information

This Technical Data Sheet supersedes those previously issued.

Jotun Danmark recommends that you consult our technical data sheet (TDS), safety data sheet (SDS) as well as data sheet for Operations and Maintenance for the product.

Please visit our website at [www.jotun.dk](http://www.jotun.dk) to find a Jotun dealer near you.

Jotun Danmark A/S  
Jernet 6  
6000 Kolding  
Tlf.: +45 76 30 32 00  
Mailadresse: mail@jotun.dk

## Disclaimer

The information in this document is given to the best of Jotun's knowledge, based on laboratory testing and practical experience. Jotun's products are considered as semi-finished goods and as such, products are often used under conditions beyond Jotun's control. Jotun cannot guarantee anything but the quality of the product itself. Minor product variations may be implemented in order to comply with local requirements. Jotun reserves the right to change the given data without further notice.

Users should always consult Jotun for specific guidance on the general suitability of this product for their needs and specific application practices.

If there is any inconsistency between different language issues of this document, the English (Eng) version will prevail.

This Technical Data Sheet supersedes those previously issued.

Jotun Danmark recommends that you consult our technical data sheet (TDS), safety data sheet (SDS) as well as data sheet for Operations and Maintenance for the product.

Please visit our website at [www.jotun.dk](http://www.jotun.dk) to find a Jotun dealer near you.